

# M9 PAEDIATRIC BED



## Caring for the needs of both children and parents

An outstanding low height of 350mm makes entry and exit safer and easier for children. The bed has the added ability to accommodate a parent alongside in equal comfort up to the safe working load of 250kg.

The M9 Paediatric Bed is tailored to younger patients from 30 months of age and up in full compliance with the most demanding international safety standards.

Fitted as standard are safer, close-space siderails, an integrated bed extension, dual controls and under bed lighting. The bed is also compatible with existing Howard Wright accessories.


### FEATURES

- Fully electric lockable functions with battery backup
- High quality LINAK and TENTE components
- 16° Trendelenburg / 13.5° Reverse Trendelenburg
- CPR quick release backrest (dampened)
- Central braking via 2 brake pedals
- Attendant control handset (ACH) with under bed light


### OPTIONS AND ACCESSORIES

- Bed mover push bar (compatible with most bed movers)
- PREMA Compact
- Siderail covers
- Residual current device (RCD)
- Integrated bed extension
- Compatible with M9 Howard Wright accessories



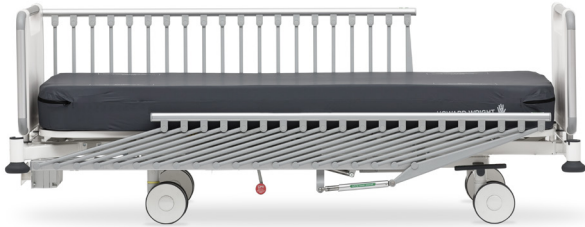

350mm low height

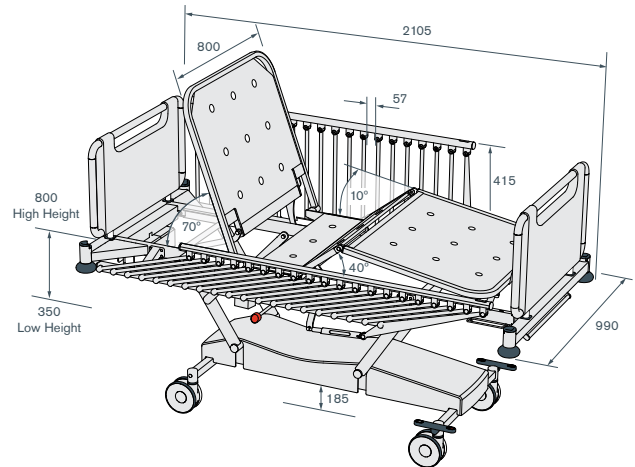

## SPECIFICATIONS

<b>MODEL:</b>	<b>M9 Paediatric Bed</b>
<b>IP RATING:</b>	IPX4
<b>EEC CLASSIFICATION:</b>	Class 1, Non-invasive
<b>MAXIMUM SWL:</b>	250kg (incl. patient and accessories)
<b>BED MASS:</b>	130kg (incl. siderails and bed ends)

- Durable powdercoated steel structure
- 4 large soft corner buffers
- LINAK electric system with 4 actuators. Approved to IEC 60601-1
- Power input: 220-240 VAC, 50-60 Hz, 2.0 A max Power output: 24 VDC
- Paediatric-specific siderails
- Backrest and legraise have safety spline
- Potential equalisation terminal
- Central locking braking with 2 brake pedals and 1 steer castor
- 4 accessory sockets
- CPR quick release backrest (dampened)
- Power cord storage

## OPTIONS

- Residual current device (RCD)

## SAFETY COMPLIANCE

- Developed in accordance with the requirements of IEC60601-1:2005, IEC60601-2-52:2009 & ASTM F1821-11b in part

## DIMENSIONS

- Overall (incl. corner buffers): L: 2105 - 2305mm, W: 990mm
  - Mattress platform: L: 1900 - 2100mm, W: 800mm
  - Siderail: L: 1450mm, H: 415mm (above mattress platform)
  - Space between siderail bars: 57mm
  - Corner buffer diameter: 90mm
  - Wheel base: 1200mm, wheel track: 630mm
  - Castor diameter: 150mm dual wheel Linea Castors
  - Maximum deck height: 800mm, minimum deck height: 350mm
  - Linear translation as bed raises and lowers: 0mm
  - Trendelenburg 16°, reverse Trendelenburg 13.5°
  - Maximum backrest angle: 70°
  - Maximum upper legraise angle: 40° Maximum lower legraise angle: 10°
- (All angular dimensions are with reference to horizontal)

## UNDER BED CLEARANCES (FOR PATIENT LIFTERS & BED MOVERS)

- Bogie to floor: 185mm
- Elevator to floor at lowest height: 140mm

[www.howardwrightcares.co.uk](http://www.howardwrightcares.co.uk)



Design and Development, Production, Sales, Distribution and Servicing of Medical Beds, Stretchers and Accessories

Howard Wright Limited has a policy of continuous product improvement and reserves the right to change product specifications without notice. Howard Wright Limited is certified to ISO13485:2016

