

HOWARD WRIGHT. 
M9 SHORT STAY



Use your trolley as a bed.

The M9 Short Stay trolley is fully electric to reduce manual handling and has an outstanding 350mm low height for safer patient entry and exit.

Developed in accordance with the hospital bed standard EN60601-2-52:2010, the M9 Short Stay

trolley ensures the safety of both patients and caregivers. In busy clinical environments the patient can stay longer on the trolley without compromising comfort and safety. Patient flow will be improved, and resources can be allocated elsewhere in the hospital environment.

The 125mm thick mattress and the Attendant Control Handset with underbed light gives the patient extra comfort and security when staying overnight.

FEATURES

- Designed to the hospital bed standard
- Backlit handset and Attendant Control Handset (at foot end) with underbed light
- Fully electric, lockable functions with battery backup
- Generous 2000mm x 700mm patient platform
- Outstanding 350mm low height and 800mm high height
- Effortless central locking brakes with 5th wheel steering


OPTIONS AND ACCESSORIES

- Radiolucent deck
- Multiple O₂ cylinder carrier sizes available
- Removable IV pole able to fit in any corner
- Plug in foot end with push handles and monitor tray
- A full range of Howard Wright accessories is available





350mm low height to mattress platform

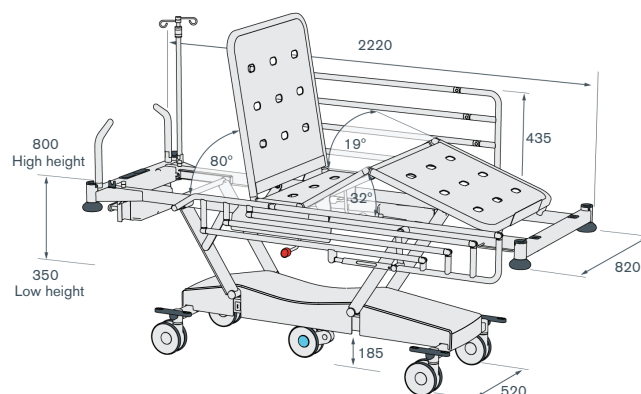

SPECIFICATIONS

MODEL:	M9 Short Stay
IP RATING:	IPX4
EEC CLASSIFICATION:	Class 1, Non-invasive
MAXIMUM SWL:	250kg (incl. patient and accessories)
BED MASS:	120kg (incl. siderails and bed end)

- Durable powdercoated steel structure
- Large soft corner buffers and accessory sockets at all four corners
- LINAK electric system with 4 actuators
- Power input: 220-240 VAC, 50-60 Hz, 2.0 A max Power output: 24 VDC
- Lift assist easy-clean siderails
- Integrated two position, ergonomic fold away push handles
- Easy access control box with power cord storage
- Dual drainage bag rails
- Backrest and legraise have safety spline
- Potential equalisation terminal
- Central locking braking via 4 brake pedals and 5th wheel steering
- Fixed, fold down IV pole extending up to 1410mm above mattress platform
- CPR quick release backrest (gas assist dampened)

OPTIONS

- Radiolucent deck
- Plug in foot end with push handles and monitor tray
- A full range of Howard Wright accessories

SAFETY COMPLIANCE

- Developed in accordance with the requirements of EN60601-2-52:2010 the Hospital Bed Standard

DIMENSIONS

- Overall (incl. corner buffers): L: 2220mm, W: 820mm
 - Mattress platform: L: 2000mm, W: 700mm
 - Backrest: L: 750mm
 - Siderail: L: 1315mm, H: 435mm (above mattress platform)
 - Space between siderail bars: 92 mm (25mm when lowered)
 - Corner buffer diameter: 90mm
 - Wheel base: 1300mm, wheel track: 520mm
 - Castor diameter: 150mm dual wheel
 - Maximum deck height: 800mm, minimum deck height: 350mm
 - Linear translation as bed raises and lowers: 0mm
 - Trendelenburg 16°, reverse Trendelenburg 13.5°
 - Maximum backrest angle: 80°
 - Maximum upper legraise angle: 32° Maximum lower legraise angle: 19°
- (All angular dimensions are with reference to horizontal)

UNDER CARRIAGE CLEARANCES (FOR PATIENT LIFTERS & BED MOVERS)

- Elevator to floor at lowest height: 140mm
- Base to floor: 185mm

www.howardwrightcares.co.uk

©Howard Wright Limited, 2019



Design and Development, Production, Sales, Distribution and Servicing of Medical Beds, Stretchers and Accessories

Howard Wright Europe Limited has a policy of continuous product improvement and reserves the right to change product specifications without notice. Howard Wright Limited is certified to EN ISO13485:2016.

